

08/2015

# **Mod:** TCM-32


**Production code:** FTI139R (230/1) (TI32R)



**Diamond**  
catering equipment



## TI 32 R

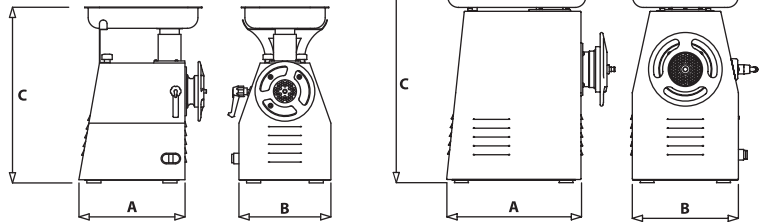

	A	B	C	Alimentazione Power supply Spannung	Potenza Motor power Leistung	Giri/m RPM RPM	Produzione oraria Production per hour Stundenproduktion	Bocca Mouth Fleischöffnung	Piastra in dotazione Standard plate Ausstattungscheibe	Peso netto mono/tri fase Net weight single/three phase Einphasig/Dreiphasig-Nettogewicht	Dimensioni imballo Packaging dimensions Verpackungsmaßung	Peso lordo mono/tri fase Gross weight single/three phase Einphasig/Dreiphasig-Bruttogewicht
	mm	mm	mm	Volt/Hz	Kwatt/Hp		kg	mm	mm	kg	mm	kg
<b>TI 12 R</b>	400	260	490	230/50 - 230-400/50	1,10 (1,50)	140	250	Ø70	Ø 6	26,0/26,0	480x300x510	28,0/28,0
<b>TI 22 R</b>	450	260	530	230/50 - 230-400/50	1,50 (2,00)	140	400	Ø82	Ø 6	32,0/32,0	590x370x520	34,5/34,5
<b>TI 32 RS</b>	510	260	525	230/50 - 230-400/50	1,60 (2,20)	140	500	Ø98	Ø 6	40,0/40,0	590x370x520	43,0/43,0
<b>TI 32 R</b>	475	300	560	230/50 - 230-400/50	2,20 (3,00)	140	600	Ø98	Ø 6	52,0/46,0	620x430x650	55,0/49,0

Apparecchio per uso professionale molto potente  
 Macellerie, supermarket, grandi comunità  
 Struttura in robusta lamiera di acciaio inox AISI 304  
 Riduttore ermetico a bagno d'olio  
 Motore asincrono ventilato  
 Termica di protezione  
 Ventola di raffreddamento supplementare nel modello 32  
 Bocca carne "enterprise" asportabile disponibile in:  
 a) Ghisa alimentare (12-22) (electroless nikel plating)  
 b) Alluminio anodizzato (12-22)  
 c) Acciaio inossidabile AISI 304 (12-22-32)  
 Trafile auto affilanti in acciaio inox di serie  
 Disponibile set per insaccare  
 Inversione di marcia  
 Tubo carico carne 52mm per 120 mm  
 Dimensioni scarico 12/70 mm 22/82 mm 32/98 mm  
 Tramoggia e piatto raccolta prodotto in acciaio inox  
 Pestello in ABS  
 Centralina elettronica a 24 volt  
 Pulsante avviamento termoplastico protetto  
 da membrana in lattice di gomma  
 Produzione italiana

Heavy duty Professional equipment  
 Ideally suited for butcheries, supermarkets, etc  
 Structured in AISI 304 stainless steel  
 Hermetic steel Oil immersed reducer  
 Ventilated asynchronous motor thermal protection included  
 Optional cooling fan available for mod. 32  
 Easy-removable enterprise mouth unit available in:  
 a) electroless nikel plated cast iron (mod.12-22)  
 b) anodized aluminium (mod.12/22)  
 c) AISI 304 stainless steel (mod 12-22-32)  
 Stainless steel self-sharpening draw-plates included  
 Sausage filling kit available on demand  
 Gear inversion option available  
 Loading meat inlet dimensions: 120x52 mm  
 Output mouth dimensions: mod.12/Ø 70 mm.  
 — mod.22/Ø 82 mm. — mod.32/Ø 98 mm.  
 Stainless steel tray and hopper  
 ABS pestle  
 Central control system requires 24 volt low tension  
 On/off switch protection with waterproof rubber cover  
 Proudly Made in Italy